




POWER

FLEXIBLE CABLES: HO7RNF



HO7RNF

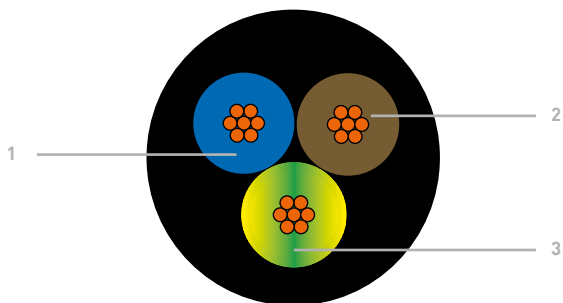

Product advantages

- Elastomer jacket for an excellent mechanical strength
- Resistance to oils
- Highly flexible even in cold environments
- UV resistance

1. Composition of core: multi-strand bare copper – classe 5 / IEC 60228
2. Conductor insulation: Type E14 elastomere according to HD22.1 S4
Color coding of conductors: according to HD 308 S2
3. Outer jacket: Type EM2 elastomere according to HD 22.1 S4. Black

Applications

- Audio and video gear power supply
- High voltage circuits

Electrical characteristics

- Nominal voltage: 450 / 750 v
- Test voltage : 2500 v
- Short-circuit temperature : 200°C

Mechanical characteristics

- Operating temperature: -25°C - +60°C
- Bend radius: 5 x Ø extérieur

Applying regulation data

- HD 22.1 S4 / HD 22.2 S3
- HD 22.4 S4

Suitable plugs



Powercon



PC 16

Part nb	Nb of conductor	Section mm ²	Outer Ø - mm		Weight	Packaging
			Mini	Maxi		
RNF 3G15	3	1,50 mm ²	9.20	11.90	157 kg / km	50. 100. 500. 1000 m and Custom length
RNF 3G25	3	2,50 mm ²	10.90	14.00	217 kg / km	50. 100. 1000 m and Custom length
RNF 3G6	3	6,00 mm ²	14.10	18.00	407 kg / km	100. 1000 m and Custom length
RNF 4G15	4	1,50 mm ²	10.20	13.10	192 kg / km	50. 100. 500. 1000 m and Custom length
RNF 5G25	5	2,50 mm ²	13.30	17.00	329 kg / km	50. 100. 500. 1000 m and Custom length
RNF 5G6	5	6,00 mm ²	17.50	22.20	640 kg / km	500. 1000 m and Custom length
RNF 5G16	5	16,00 mm ²	26.40	33.30	1564 kg / km	500 m and Custom length
RNF 5G25	5	25,00 mm ²	32.00	40.40	2291 kg / km	500 m and Custom length
RNF 13G25	13	2,50 mm ²	20.60	26.20	760 kg / km	1000 m and Custom length
RNF 19G25	19	2,50 mm ²	24.40	31.00	1068 kg / km	1000 m and Custom length

2 POLES + GROUND CONTACT POWER CONNECTORS: POWER LINE 16 A – IP44



Designation	Part nb	Packaging
Male caoutchouc plug – 2 poles + ground – 16A – IP44	PC16M	1 unit
Female caoutchouc plug – 2 poles + ground – 16A – IP44	PC16F	1 unit

4-SOCKET POWER STRIP W/O POWER SWITCH



Designation	Part nb	Packaging
4-socket power strip without power switch, cord included, straight male plug – black plastic– 2 m	BA4P	1 unit

TEN47 – SHOWLINE RANGE

INLINE MALE WITH NUT

Nb of contacts	Part nb	Packaging
19	CFM19	1 unit

INLINE MALE WITH NUT – SPIDER VERSION

CFM19SPIDER3G25

Nb of contacts	Cable	Part nb	Packaging
19	6 x RNF3G1.50 mm ²	CFM19SPIDER3G15	1 unit
19	6 x RNF3G2.50 mm ²	CFM19SPIDER3G25	1 unit

PANEL MALE CONNECTOR WITH NUT

Nb of contacts	Part nb	Packaging
19	CEM19	1 unit

INLINE FEMALE CONNECTOR WITHOUT NUT

Nb of contacts	Part nb	Packaging
19	CFF19	1 unit

INLINE FEMALE CONNECTOR WITHOUT NUT – SPIDER VERSION

Nb of contacts	Cable	Part nb	Packaging
19	6 x RNF3G1.50 MM ²	CFF19SPIDER3G15	1 unit
19	6 x RNF3G2.50 MM ²	CFF19SPIDER3G25	1 unit

PANEL FEMALE CONNECTOR WITHOUT NUT

Nb of contacts	Part nb	Packaging
19	CEM19	1 unit

POWERCON CONNECTORS



CABLE CONNECTORS powerCON TRUE1 – 16 / 20 A



NAC3FXW

NAC3MXW

Designation	Part nb	Packaging
Female cable connector CBC – 16 / 20 A – IP65	NAC3FXW	1 unit
Male cable connector CBC – 16 / 20 A – IP65	NAC3MXW	1 unit

CHASSIS CONNECTORS powerCON TRUE1 - 16 / 20 A



NAC3FPX

Designation	Part nb	Packaging
Appliance outlet connector, Female CBC for Male connector NAC3MX-W	NAC3FPX	1 unit
Appliance inlet connector, Male CBC for Female connector NAC3FX-W	NAC3MPX	1 unit
Inlet/Outlet combination, Male/Female CBC	NAC3P	1 unit

CABLE CONNECTOR powerCON 20 A – POWER IN



NAC3FCA

Designation	Part nb	Packaging
A-type cable connector – 3-pole – 20 A – Blue plastic shell	NAC3FCA	1 unit

CABLE CONNECTOR powerCON 20 A – POWER OUT



NAC3FCB

Designation	Part nb	Packaging
A-Type cable connector – 3 -pole – 20 A – Grey plastic shell	NAC3FCB	1 unit

CHASSIS CONNECTOR powerCON 20 A – POWER IN



NAC3MPA1

Designation	Part nb	Packaging
D-shape chassis connector – 20 A – Blue plastic	NAC3MPA1	1 unit

CHASSIS CONNECTOR powerCON 20 A – POWER OUT



NAC3MPB1

Designation	Part nb	Packaging
D-shape chassis connector – 20 A – Grey plastic	NAC3MPB1	1 unit

RNF 13G2.50 mm² CORDS 19-POLE INLINE MALE / FEMALE - TEN47



Connector 1	Connector 2	Cable
19-pole Inline male with nut TEN47 – CFM19	19-pole Inline female without nut TEN47 – CFF19	RNF13G2.50 mm ²
Part nb	Length*	Packaging
CORNF13G2515	5 m	1 unit
CORNF13G25110	10 m	1 unit
CORNF13G25120	20 m	1 unit
CORNF13G25125	25 m	1 unit

* Other lengths upon request

RNF 19G2.50 mm² CORDS 19-POLE INLINE MALE / FEMALE - TEN47



Connector 1	Connector 2	Cable
19-pole Inline male with nut TEN47 – CFM19	19-pole Inline female without nut TEN47 – CFF19	RNF19G2.50 mm ²
Part nb	Length*	Packaging
CORNF19G2515	5 m	1 unit
CORNF19G25110	10 m	1 unit
CORNF19G25120	20 m	1 unit
CORNF19G25125	25 m	1 unit

* Other lengths upon request

3 G 1.50 mm² CORD 19-POLE INLINE MALE TEN47 / 6 x PC16 FEMALE PLUGS

Connecteur 1	Connecteur 2	Câble
19-pole Inline male with nut – Spider version - TEN47 – CFM19SPIDER3G15	Moulded female plug – 2 poles + ground IP44 – 16A / 250V AC – with protection cover	RNF3G1.50 mm ²
Part nb	Length	Packaging
CSPIDERM3G15P1050	1.50 m	1 unité

3 G 1.50 mm² CORD 19-POLE INLINE FEMALE TEN47 / 6 x PC16 MALE PLUGS



Connector 1	Connector 2	Cable
19-pole Inline female without nut – Spider version - TEN47 – CFF19SPIDER3G15	Moulded male plug – 2 poles + ground IP44 – 16A / 250V AC	RNF3G1.50 mm ²
Part nb	Length	Packaging
CDSPIDERF3G15P1050	1.50 m	1 unit

MOULDED EXTENSION CORDS 16A – 3 G 1.50 mm²



CORNF3G1515

Connector 1	Connector 2	Cable
Moulded male plug – 2 poles + ground - IP44 – 16A / 250V AC	Moulded female plug – 2 poles + ground – IP44 – 16A / 250V AC – with protection cover	HO7 RNF 3G1.50 mm ²
Part nb	Length	Packaging
CORNF3G1511	1 m	1 unit
CORNF3G1513	3 m	1 unit
CORNF3G1515	5 m	1 unit
CORNF3G15110	10 m	1 unit
CORNF3G15115	15 m	1 unit
CORNF3G15120	20 m	1 unit
CORNF3G15125	25 m	1 unit

MOULDED EXTENSION CORDS 16A – 3 G 2.50 mm²



CORNF3G2515

Connector 1	Connector 2	Cable
Moulded male plug – 2 poles + ground - IP44 – 16A / 250V AC	Moulded female plug – 2 poles + ground – IP44 – 16A / 250V AC – with protection cover	HO7 RNF 3G2.50 mm ²
Part nb	Length *	Packaging
CORNF3G2513	3 m	1 unit
CORNF3G2515	5 m	1 unit
CORNF3G25110	10 m	1 unit
CORNF3G25120	20 m	1 unit

EXTENSION CORDS 16A – 3 G 2.50 mm²



CORNF3G25A25

Connector 1	Connector 2	Cable
Male plug – 2 poles + ground - IP44 – 16A / 250V AC	Female plug – 2 poles + ground – IP44 – 16A / 250V AC – with protection cover	HO7 RNF 3G2.50 mm ²
Part nb	Length *	Packaging
CORNF3G25A25	25 m	1 unit
CORNF3G25A30	30 m	1 unit
CORNF3G25A50	50 m	1 unit

* Other lengths upon request

EXTENSION CORDS: **16A / powerCON – 3 G 1.50 mm²**

CORNFP3G1511

Connector 1	Connector 2	Cable
Male plug – 2 poles + ground - IP44 – 16A / 250V AC – Réf. PC16M	PowerCON cable socket – A-type for power inlet – NAC3FCA	HO7 RNF 3G1.50 mm ²
Part nb	Length *	Packaging
CORNFP3G1511	1 m	1 unit
CORNFP3G1512	2 m	1 unit
CORNFP3G1513	3 m	1 unit
CORNFP3G1515	5 m	1 unit

* Other lengths upon request

EXTENSION CORDS: **powerCON IN / OUT – 3 G 1.50 mm²**

CORPP3G1513

Connector 1	Connector 2	Cable
PowerCON cable socket – A-type for power inlet – NAC3FCA	PowerCON cable socket – B-type for power out – NAC3FCB	HO7 RNF 3G1.50 mm ²
Part nb	Length *	Packaging
CORPP3G1513	3 m	1 unit
CORPP3G1515	5 m	1 unit
CORPP3G15110	10 m	1 unit

* Other lengths upon request

EXTENSION CORDS: **powerCON TRUE ONE / 16A – 3 G 1.50 mm²**

CORPPC3G1513

Connector 1	Connector 2	Cable
PowerCON TRUE1 cable connector 16 / 20A– IP65 - NAC3FXW	Male plug 16A / 250V AC– 2 poles + ground - IP44 – PC16M	HO7 RNF 3G1.50 mm ²
Part nb	Length *	Packaging
CORPPC3G1513	3 m	1 unit
CORPPC3G1515	5 m	1 unit
CORPPC3G15110	10 m	1 unit

* Other lengths upon request

EXTENSION CORDS: **16A / powerCON – 3 G 2.50 mm²**



CORNFP3G2513

Connector 1	Connector 2	Cable
Male plug – 2 poles + ground - IP44 – 16A / 250V AC – PC16M	PowerCON cable socket – A-type for power inlet – NAC3FCA	HO7 RNF 3G2.50 mm ²
Part nb	Length *	Packaging
CORNFP3G2511	1 m	1 unit
CORNFP3G2512	2 m	1 unit
CORNFP3G2513	3 m	1 unit
CORNFP3G2515	5 m	1 unit

* Other lengths upon request

EXTENSION CORDS: **powerCON IN / OUT – 3 G 2.50 mm²**



CORPP3G2513

Connector 1	Connector 2	Cable
PowerCON cable socket – A-type for power inlet – NAC3FCA	PowerCON cable socket – B-type for power out – NAC3FCB	HO7 RNF 3G2.50 mm ²
Part nb	Length *	Packaging
CORPP3G2513	3 m	1 unit
CORPP3G2515	5 m	1 unit
CORPP3G25110	10 m	1 unit

* Other lengths upon request

EXTENSION CORDS: **powerCON TRUE ONE / 16A – 3 G 2.50 mm²**



CORPPC3G2513

Connector 1	Connector 2	Cable
PowerCON TRUE1 cable connector 16 / 20A– IP65 - NAC3FXW	Male plug 16A / 250V AC– 2 poles + ground - IP44 – PC16M	HO7 RNF 3G2.50 mm ²
Part nb	Length *	Packaging
CORPPC3G2513	3 m	1 unit
CORPPC3G2515	5 m	1 unit
CORPPC3G25110	10 m	1 unit

* Other lengths upon request