

NVR2860E-HD

8-bay RAID Professional Network Video Recorder



Features

High-performance, High-capacity

- 16 x 1080p@30fps video decoding capability
- Up to 4K video supported
- Up to 64 channel
- Up to 320Mbps incoming bandwidth
- 320Mbps output bandwidth
- 64 user access simultaneously
- Max. 8 HDDs up to 48TB storage
- IP SAN and e-SATA storage supported

Easy to install

- Automatic network organizing
- Built-in DHCP server

High reliability


- Embedded Linux
- RAID 0/1/5/6/10
- Supports Automatic Network Replenishment (ANR)
- Supports Packet Loss Recovery (PLR)

Abundant functions and features

- HDMI/VGA simultaneously output different content
- E-Map, TV-Wall supported
- Bi-directional audio, Broadcasting
- NAT, Socks5
- Alarm management
- Free CMS (NVR Station), supports 128 NVR simultaneously
- CMS supports 6 screens simultaneously (4 x Live viewing, 1 x E-Map, 1 x TV-Wall)

Dimensions

Unit: mm

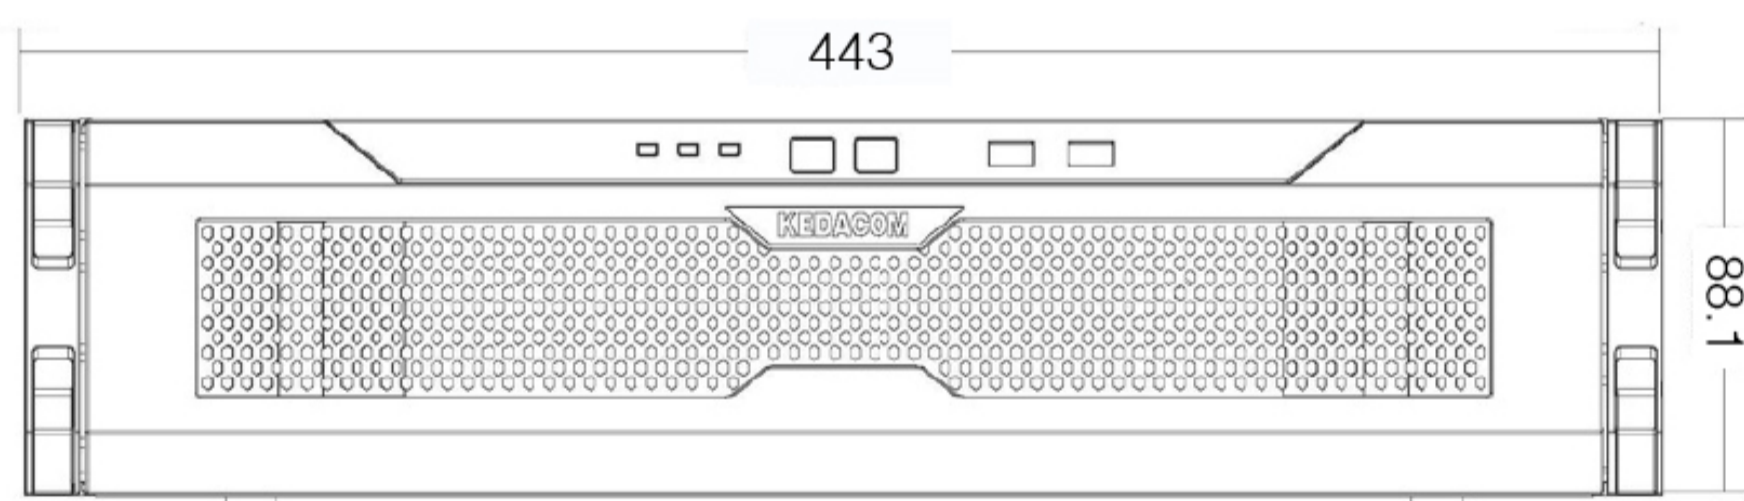

Specifications

Model	NVR2860E-16HD	NVR2860E-32HD	NVR2860E-48HD	NVR2860E-64HD
Video/Audio Input				
IP Camera Input	16 channel	32 channel	48 channel	64 channel
Resolution	8MP(4K), 6MP, 5MP, 4MP, 3MP, 1080p, UXGA, 960p, 720p, XGA, SVGA, D1, CIF, QCIF		3MP, 1080p, UXGA, 960p, 720p, XGA, SVGA, D1, CIF, QCIF	
Compression	H.264			
Protocols	ONVIF, RTSP, KEDACOM			
Incoming Bandwidth	80Mbps	160Mbps	240Mbps	320Mbps
Live Viewing				
Local Display	1 x HDMI, 1 x VGA, simultaneously output different content			
Multi Screen Display Local monitor (Main / Secondary):	1/1, 4/1, 9/1, 15/1, 16/1, 24/1, 1+4/1, 1+8/1, 1+9/1, 1+15/1, 4/9, 9/4, 9/9, 16/16	1/1, 4/1, 9/1, 15/1, 16/1, 24/1, 25/1, 35/1, 36/1, 1+4/1, 1+8/1, 1+9/1, 1+15/1, 4/9, 9/4, 9/9, 16/16	1/1, 4/1, 9/1, 15/1, 16/1, 24/1, 25/1, 35/1, 36/1, 1+4/1, 1+8/1, 1+9/1, 1+15/1, 4/9, 9/4, 9/9, 16/16	1/1, 4/1, 9/1, 15/1, 16/1, 24/1, 25/1, 35/1, 36/1, 64/1, 1+4/1, 1+8/1, 1+9/1, 1+15/1, 4/9, 9/4, 9/9, 16/16
Multi Screen Display Client	up to 4 screens simultaneously: 1, 3, 4, 9, 12, 16, 20, 25, 30, 36, 42, 49, 56, 63, 64 1+5, 1+7, 1+8, 1+9, 1+11, 1+15, 1+16, 1+33, 1+47, 1+48			
E-Map Function	Live Viewing in E-Map (NVR Station) E-PTZ / Scheme / Polling / TV-Wall (optional with decoder)			
Recording				
Resolution	8MP(4K), 6MP, 5MP, 4MP, 3MP, 1080p, UXGA, 960p, 720p, XGA, SVGA, D1, CIF, QCIF		3MP, 1080p, UXGA, 960p, 720p, XGA, SVGA, D1, CIF, QCIF	
Mode	Manual / Continuous / Schedule / Event (Pre / Post)			
Event Trigger	Supported			
Tag	Supported			
Reliability	ANR			
Search & Playback				
Search Mode	Date and time (Calendar) / Event			
Resolution	8MP(4K), 6MP, 5MP, 4MP, 3MP, 1080p, UXGA, 960p, 720p, XGA, SVGA, D1, CIF, QCIF		3MP, 1080p, UXGA, 960p, 720p, XGA, SVGA, D1, CIF, QCIF	
Playback (Local Monitor)	1 x 4K@30fps / 4 x 4MP@30fps / 16 x 1080p@30fps		4 x 3MP@30fps / 16 x 1080p@30fps	
Playback (Client)	16 x 4K@30fps		16 x 3MP@30fps	
Synchronize Playback (Local Monitor)	4 x 4MP@30fps / 16 x 1080p@30fps		4 x 3MP@30fps / 16 x 1080p@30fps	
Synchronize Playback (Client)	4 x 4K@30fps		4 x 3MP@30fps	
Function	Slow forward / Fast forward / Loop / Single frame / E-PTZ / Slice playback			
Storage				
Max. Internal HDDs	8 x 3.5" HDD			
RAID	Max. 48TB (up to 6TB/each) RAID 0/1/5/6/10			
External	IP SAN (iSCSI), up to 10 x IP SAN, Max. 100T, Max. write speed 128Mbps e-SATA			
Function	Disk group / Quota / Disk dormancy			
Audio				
Compression	G.711a / G.711u / ADPCM / G.722 / G.722.1c / AAC-LC			
Bit rate	32kbps ~ 64kbps			
Audio Function	Bi-directional audio / Dumb / Mute / Broadcasting			
Alarm				
Service Alarm Triggers	Alarm input / Video lost / Motion detection / Tampering / Guard line / Defocus / Scene change / Enter guard area / Exit guard area / Object left / Object removal / Gathering / Audio surge			
System Alarm Triggers	Device disconnect / No disk / Disk error / IP Address conflict / Network disconnect / Low speed / Insufficient recording space / MAC address conflict / Insufficient snapshot space			
Alarm Events	Snapshot / Recording / PTZ preset / Buzzer / Email / Link to Client / Alarm caption / Live view in first window / Link to TV Wall / Link to secondary screen / Full screen viewing			
System				
Operating System	Embedded Linux			
User Management	Admin / User			
Log Management	User login / User operation / Alarm / Backup / Update			
Application Programming	NVR Station SDK			
Network				
Network Protocols	TCP/IP, UDP, HTTP, DHCP, DNS/DDNS, RTP/RTCP, RTSP, PPPoE, FTP, SNMP, VSIP, UPNP, SMTP, IPv4, IPv6 (optional)			
Viewer Software	CMS (NVR Station) / Web / iOS app / Android app			
Max. User Access	64 Users			
Output Bandwidth	256Mbps			
Function	NAT / Socks5 / Multiple network access / Packet loss recovery / Automatic network organizing			
Network Test	Supported			
Interfaces				
Ethernet	2 x Gigabit network port, RJ45 interface			
Video Out	1 x HDMI (up to 1920 x 1080@60Hz) 1 x VGA (up to 1920 x 1080@60Hz)			
Audio In / Out	1 x RCA Line in / 1 x RCA Line out			
Alarm In / Out	2 x Inputs / 2 x Outputs			
Control	2 x RS485			
USB	4 x USB 2.0			
e-SATA	1 x e-SATA			
Environmental				
Operating Temperature	-10°C ~ 55°C / 14°F ~ 131°F			
Operating Humidity	10% ~ 85%			
Electrical				
Power	100 ~ 240V AC, 50 ~ 60Hz			
Power Consumption	Max. 65W (HDD not included)			
Mechanical				
Weight	12.5kg / 27.5lb (HDD not included)			
Dimensions	443 x 561 x 88mm / 17.44" x 22.09" x 3.46"			